




FEATURES

STAGE
SERIES

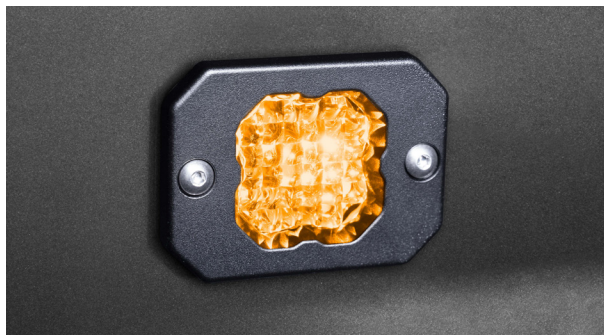

- Allows for flush installation with truck bumpers, truck beds, and anywhere else you can think of
- High intensity LED chip
- Backlighting available in amber and red
- Durable powdercoated aluminum construction
- Integrated Deutsch-style connector

GENERAL SPECIFICATIONS

Optic	Peak Beam Intensity (Candela)	Illuminance (lux @10m)	Measured Output (Lumens)	Raw Output (Lumens)	Output Color
Flood	400 cd	4 lux	1,030 lm	1,449 lm	6000K White

Functions: White Output with Amber and Red Backlight

Voltage Range: 9-16V

Current Draw (amps @ 12.8V): 1.1A (output), 24mA (backlight)

Wattage: 13.6W (output), 0.3W (backlight)

Connector Type: 4 Pin DT Connector

Driver Type: Integrated Driver

LED Type/Count: Cree XPL 6000K/1 total, 3014/3 total

Compliance Rating: J575 Durability Test

Intrusion Rating: IP67 Weatherproof

Operating Temperature: -40°C to 85°C

What's Included:

- One (1) or Two (2) SSC1 Flush LED Pods
- One (1) or Two (2) Deutsch-style wire pigtails
- One (1) or Two (2) Flush Frame gaskets
- Mounting hardware and drilling template

Dimensions & Weight:

Length: 7.5" **Width:** 4.5" **Height:** 3"

Weight: 0.7 lbs (single), 1.2 lbs (pair)

SKUs: Append "S" to the end of each SKU for single and "P" for pair

DD6470 SSC1 Sport White Flood Flush ABL


DD6471 SSC1 Sport White Flood Flush RBL

All data and specifications are nominal values and may vary.

PUBLISHED: 10-24-2024


COLORIMETRIC SPECIFICATIONS

WHITE MAIN BEAM

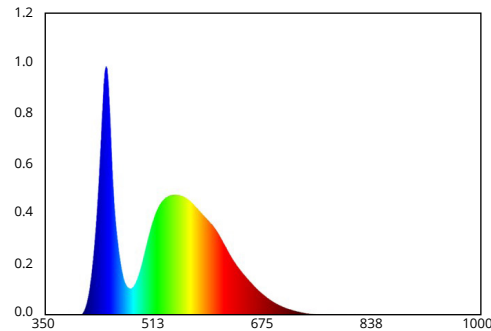


Spectral Distribution

CHROMATICITY




X=0.3129, Y=0.3310

AMBER BACKLIGHT

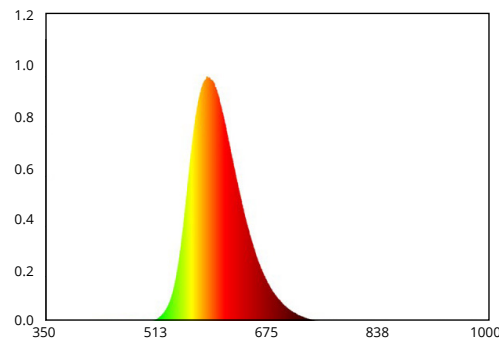


Spectral Distribution

CHROMATICITY




X=0.5615, Y=0.4306

RED BACKLIGHT

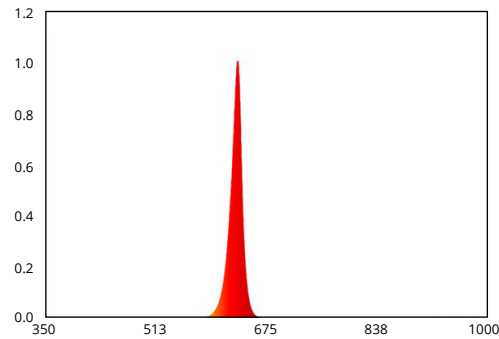


Spectral Distribution

CHROMATICITY




X=0.6929, Y=0.3064

PRODUCT DIMENSIONS

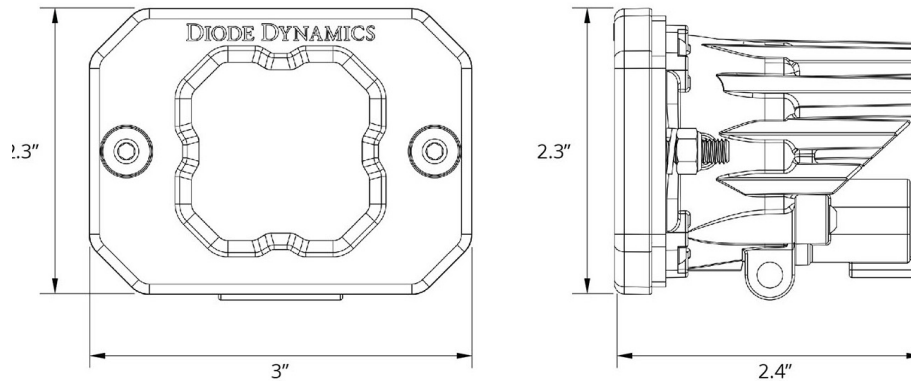


PHOTOMETRIC SPECIFICATIONS


Flood Optic Isolux

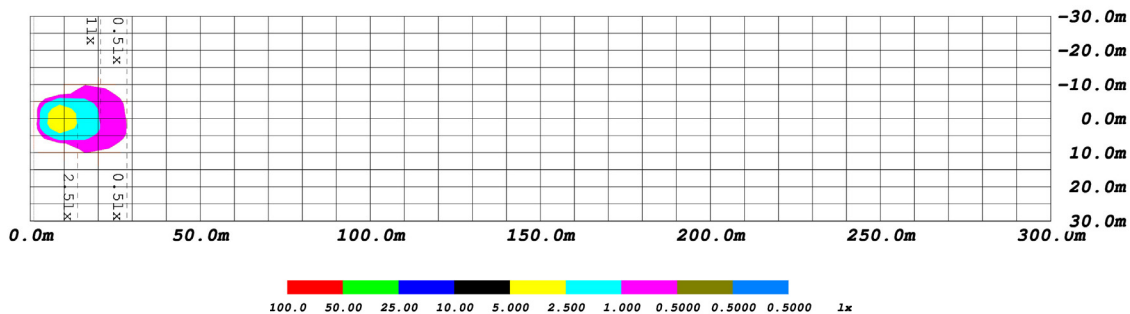

Flood Optic Perspective

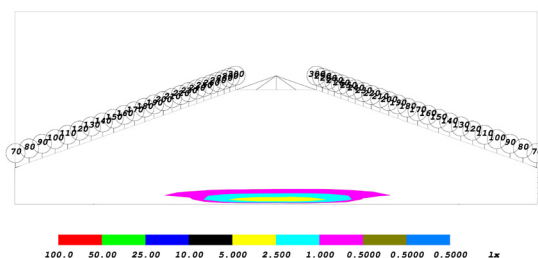

Flood Optic Isocandela

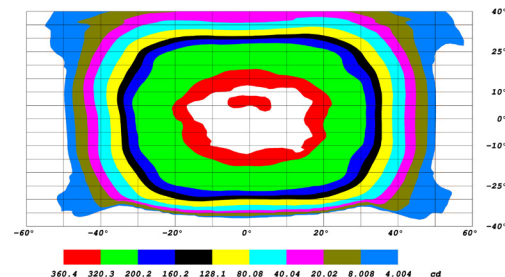

PUBLISHED: 10-24-2024